

BRAVÍSSIMA

Higher efficient and agile
in corn harvesting



BRAVÍSSIMA

+EFFICIENCY & AGILITY IN CORN HARVESTING

Available in **7 to 26 row units**, Bravíssima corn head harvests plenty of corn types. More robust and efficient, it allows operations in tall crop plants and it adapts to various types of harvesters.

Adjustment of the deck plates by means of the control lever

The deck plates feature a hydraulic regulation* with adjustment options **right through the machine cab control lever**. The adjustments are performed easily and quick and according to the corn plant stalk. As a result, delivering a higher efficient harvesting.

* The adjustment of the deck plates is either mechanical or hydraulic

** Check the harvester availability

Torque limiter on the auger

The corn head is equipped with an auger torque limiter that provides more safety during harvesting and avoids system damages in case of row-unit lock or overload.

Torque limiter for each row unit


The torque limiters are individual and with a disarming radial system that ensures longer equipment life and avoids the disarming of the row units that are not blocked.



-30%

**LESS STRAW FED THROUGH
THE HARVESTER**

**LOWER FUEL CONSUMPTION
HIGHER OPERATING YIELD**

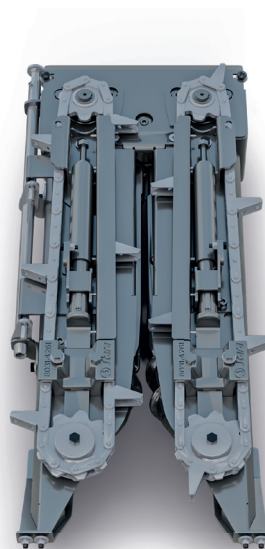

SMART ROW DESIGN

The Bravíssima line was developed with some smart design that features the best harvesting angle, **50 mm longer and the cone nozzles are built in casting steel**. It all ensures higher efficient corn harvesting and better straw finishing.

Robust and light structure

Bravíssima features an aluminium transmission gearbox. As a result, it reduces the weight and extends the durability against corrosion.

Self-tensioning of the row

Featuring a self-tensioning system that automatically tensions the roller chains of the row units to ensure **less maintenance and stops while harvesting**.



**ADJUSTABLE
ROW UNIT
ASSEMBLY**

- **STALK ROLLS WITH 8 VANES**
- **GATHERING CHAINS WITH 6 LUGS**
- **MULTIPLE ROTATION OPTIONS IN THE TRANSMISSION GEARBOX**

Side fairing

The side fairing adds **two height levels**. The adjustment makes sure of better corn cob collecting, especially when harvesting taller corn plants.



Height sensor

Available in corn head with 14 to 26 row units, the system has 3 sensors that **automatically level the corn** head height in relation to the soil, **allowing to operate close to the surface**, and the operator doesn't need to manually adjust it.

* Check the harvester availability

Feeding system

To ensure more harvesting uniformity, Bravissima adds a constant feeding system, which avoids the corn head clogging.

Side transmission gearbox

It is grease-bathed and has an efficient self-compensator tensioner with a spring, enabling reverse activation without damaging the system.



TECHNICAL SPECIFICATIONS

BRAVISSIMA

Chassis	Row units	Spacing	Total width	Weight
4090	9	45 cm	4,360 mm	2,030 kg
	8	50 cm		-
	7	60 cm		-
4540	10	45 cm	4,810 mm	2,350 kg
	9	50 cm		-
4990	11	45 cm	5,260 mm	2,550 kg
	10	50 cm		2,450 kg
5490	12	45 cm	5,760 mm	2,800 kg
	11	50 cm		2,650 kg
5890	13	45 cm	6,160 mm	2,900 kg
	10	60 cm		-
	8	76.2 cm		-
5990	12	50 cm	6,260 mm	2,750 kg
	10	60 cm		-
6360	14	45 cm	6,630 mm	3,150 kg
	12	52.5 cm		-
6530	13	50 cm	6,800 mm	3,000 kg
	11	60 cm		-
6850	15	45 cm	7,120 mm	3,450 kg
	13	52.5 cm		-
7080	14	50 cm	7,350 mm	3,350 kg
	12	60 cm		-
7240	16	45 cm	7,510 mm	3,500 kg
	15	50 cm		3,400 kg
7490	14	52.5 cm	7,760 mm	-
	10	76.2 cm		-
	17	45 cm		3,700 kg
7690	13	60 cm	7,960 mm	-
	16	50 cm		3,650 kg
7990	15	52.5 cm	8,260 mm	-
	18	45 cm		3,950 kg
8140	11	76.2 cm	8,410 mm	-
	11	76.2 cm		-

Chassis	Row units	Spacing	Total width	Weight
8380	16	52.5 cm	8,860 mm	-
	14	60 cm		-
	11	76.2 cm		-
8590	19	45 cm	8,860 mm	4,100 kg
	17	50 cm		3,900 kg
9040	20	45 cm	9,310 mm	4,300 kg
	18	50 cm		4,100 kg
	12	76.2 cm		-
9490	21	45 cm	9,760 mm	4,530 kg
	19	50 cm		4,300 kg
	18	52.5 cm		-
	16	60 cm		-
9990	22	45 cm	10,260 mm	4,750 kg
	20	50 cm		4,500 kg
	19	52.5 cm		-
10390	23	45 cm	10,660 mm	4,930 kg
	14	76.2 cm		-
10490	23	45 cm	10,660 mm	-
	21	50 cm		-
	20	52.5 cm		-
	14	76.2 cm		-
10850	24	45 cm	11,120 mm	5,050 kg
	18	60 cm		-
10990	22	50 cm	11,260 mm	5,100 kg
	21	52.5 cm		-
11530	23	50 cm	12,050 mm	-
	22	52.5 cm		-
11780	26	45 cm	12,050 mm	5,550 kg
	24	50 cm		5,350 kg
11990	20	60 cm	12,260 mm	-
	16	76.2 cm		-
	16	76.2 cm		-

LEARN MORE

Position your mobile phone on the QR code to read it and check it out!


Video

See for yourself, Bravíssima operation quality in the crop field.



Website

Access the Bravíssima on the Stara website for more information.

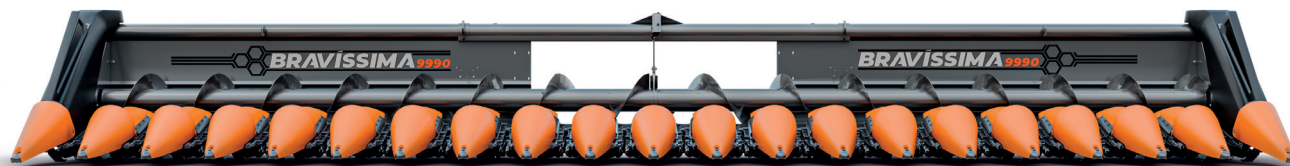

THIS SPACE IS INTENDED FOR DEALERSHIP DATA

www.stara.com.br

STARA S.A. Indústria de Implementos Agrícolas | Av. Stara, 519 - Mail box 53 - Não-Me-Toque/RS | Phone number: 55 54 3332 2800 | Postcode: 99470-000 | Email address: faleconosco@stara.com.br

[Linked in/company/Stara](#) -
 [YouTube/StaraBrasil](#) -
 [Facebook/StaraBrasil](#) -
 [Instagram/StaraBrasil](#) -
 [Twitter/starabrazil](#)